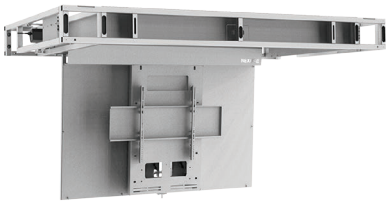

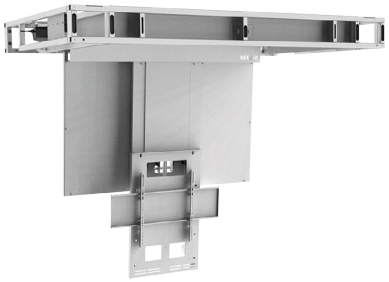

MODEL CL-65e

CEILING FLIP-DOWN AND EXTEND TV LIFT

For Up to 65″ TV

Lift Tilts	95° Downwards
Lift Lowers	24″ [61 cm] Towards Floor
TV Maximum Screen Size	65″
TV Maximum Height	36″ [91.4 cm]
TV Maximum Width	61″ [154.9 cm]
TV Maximum Depth	3″ [7.6 cm]
Maximum Weight	100 lbs [45 kg]

Model CL-65e combines our popular flip-down TV lift with versatile downward-extension capability. This lift is perfect for high ceilings and homeowners who want an even more flexible viewing experience. CL-65e can be installed in the ceiling framing or bolted directly to the ceiling surface, for simple integration in any space. It requires just 7-5/8" of vertical space for in-ceiling installations, and accommodates up to 65" TVs.

TEN YEAR 10 WARRANTY

MONEY BACK 30 DAY GUARANTEE

TECHNICAL SUPPORT

All Nexus products are shipped in custom-made protective packaging, and they include everything you need to mount and operate them. The products are designed for easy assembly, and simple instructions with photos are included.

MODEL CL-65e

TECHNICAL SPECIFICATIONS

- 100 lbs [45.4 kg] total lift capacity
- TV maximum screen size: 65"
- Tilts 95° downward
- Lowers 24" [61 cm]
- No exposed tracks, gears or scissors
- UL recognized components
- Draws 3-1/2 Amps @ 110V and 1-3/4 Amps @ 220V at max thrust
- 40 seconds to fully open
- Quiet - runs at just 48 dB
- Screw-driven mechanism
- Aluminum construction
- Controls included: IR (direct and indirect), IP (wired and wireless), contact closure, RF (handset included)
- "Soft Start" and "Soft Stop" for smooth ride
- Power is available in these formats: USA, 110V / Europe, 230V / Japan, 100V / Australia, 240V / UK, 230V
- Can be surface mounted (hardware not provided)

WHAT'S PROVIDED

- Ready to install, assembled CL-65e lift system
- Control box with power cord
- Universal Control Hub (includes IR, IP and contact closure) with RF remote control handset
- Backup control switch
- Installation hardware
- Screen locking hardware
- Allen wrenches for screen locks and adjustability system
- Installation instructions with photos

***Lift must be mounted on a level ceiling. It is not compatible with angled or pitched ceilings.**

DIMENSIONS AND DIAGRAMS

Detailed build dimensions and diagrams are available for download at Nexus21.com

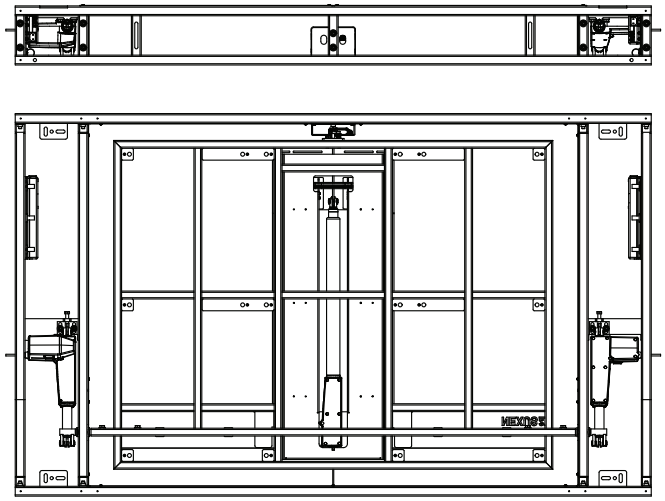

CONTROL OPTIONS

This lift features the Nexus 21 Universal Control Hub which includes:

- IR (direct + indirect)
- IP (wired + wireless)
- Contact Closure
- RF (handset included)

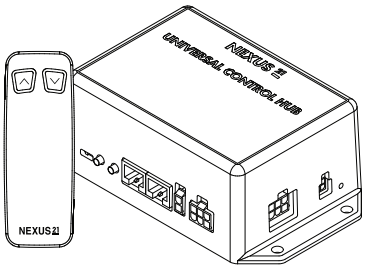

INSTALLATION TIPS

Tip #1: Calculate the weight of the flip-down panel that will attach to the lift before installation so you know you are within the weight limit

Tip #2: Bevel the rear edge of the flip-down panel at 45° to achieve a 1/8" reveal

Tip #3: Use the adjustment screws to fine tune the flip-down panel so it is flush with the surrounding ceiling

MOUNTING FOR FLIP-DOWN PANEL

Match any ceiling material to seamlessly hide the lift within the ceiling (weight limit applies).

Use appropriate fasteners for attaching the flip-down panel material (see installation manual).