MODEL L-27i

CABINET DROP-DOWN TV LIFT

For Up to 48″ TV

Lift Extends	26.5″ [67.3 cm] Downwards
TV Maximum Screen Size	48″
Maximum Weight	90 lbs [40.8 kg]

Model L-27i packs an incredible combination of features into a compact and powerful system. Smooth motion, quiet operation and industry-leading reliability have made this lift the choice of homeowners and professionals around the world. Popular uses include lowering your TV from the ceiling, above built-in fireplaces and in outdoor patio enclosures.

- Industry-Leading Reliability
- Near Silent Operation
- Includes Mounting Kit for Your Ceiling Cover
- Popular for Bars and Outdoor Patios

All Nexus 21 products are shipped in custom-made protective packaging, and they include everything you need to mount and operate them. The products are designed for easy assembly, and simple instructions with photos are included.

MODEL L-27i

TECHNICAL SPECIFICATIONS

- 90 lbs [40.8 kg] total lift capacity
- TV maximum screen size: 48"
- Travels 26.5" [67.3 cm]
- No exposed tracks, gears or scissors
- UL recognized components
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Speed 1.7" / sec. (only 15 sec. to fully lower)
- Quiet - runs at just 45 dB
- Chain-driven mechanism
- Steel construction
- Controls included: IR (direct and indirect), IP (wired and wireless), contact closure, RF (handset included)
- Exclusive Nexus 21 Safety Features included
- "Soft Start" and "Soft Stop" for smooth ride
- Power is available in these formats: USA, 110V / Europe, 230V / Japan, 100V / Australia, 240V / UK, 230V

WHAT'S IN THE BOX

- Motorized lift column (the motorized unit is pre-assembled and ready to use)
- Heavy duty screen support with universal TV mounting plate
- Lid plate with adjustable extensions and anti-pinch system
- Base plate and upper back mounting bracket
- Control box with power cord
- Universal Control Hub (includes IR, IP and contact closure) with RF remote control handset
- Backup control switch
- Cord control wraps
- All hardware for assembly and mounting
- Full assembly instructions with photos

DIMENSIONS AND DIAGRAMS

Detailed build dimensions and diagrams are available for download at Nexus21.com

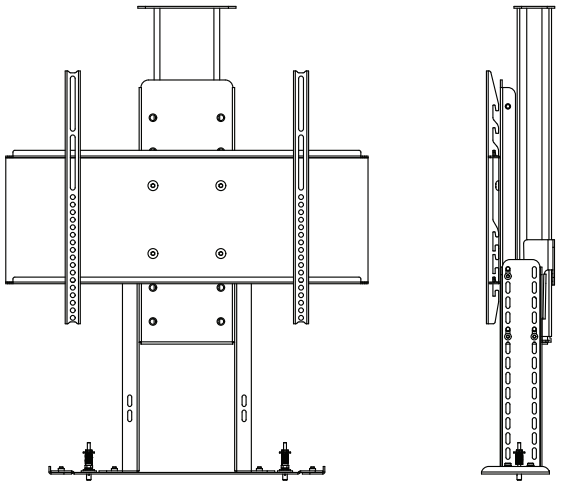

CONTROL OPTIONS

This lift features the Nexus 21 Universal Control Hub which includes:

- IR (direct + indirect)
- IP (wired + wireless)
- Contact Closure
- RF (handset included)

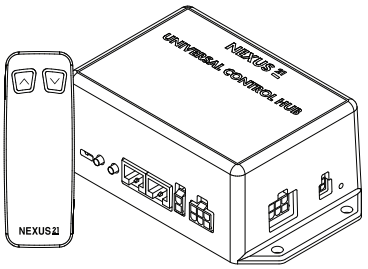

MOUNTING BRACKET FOR COVER PLATE

Attach any type of cover to the lid plate to seamlessly hide the lift within the ceiling or cabinet. Spring loaded lid stabilization hardware included.



TEN YEAR 10 WARRANTY

MONEY BACK 30 DAY GUARANTEE

TECHNICAL SUPPORT