MODEL DM-25 DIAGRAM

WITH HINGED TOP GUIDE - PRIMARY CABINET DIMENSIONS

SPECIFICATIONS	
MAX WEIGHT CAPACITY :	130 lbs [59 kg]
COMBINED WEIGHT OF THE MONITORS, ALL ACCESSORIES, & LID	
MAX TRAVEL [EXTENSION] :	26.5 in [67.3 cm]
LIFT SYSTEM HEIGHT :	23.375 in [59.4 cm] TO 35.375 in [89.9 cm]
MIN MONITOR HEIGHT :	14 in [35.5 cm]
MAX MONITOR HEIGHT :	25.75 in [65.4 cm] MINUS LID THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)	
MONITOR(S) DIMENSIONS:	W_____, H_____, D_____ W_____, H_____, D_____
MIN. INTERIOR CABINET WIDTH MIN. LID CUTOUT WIDTH :	COMBINED MONITOR W+2 in [5.1 cm] = _____ OR 34 in [86.4 cm]
MIN. INTERIOR CABINET HEIGHT :	H+1 in [2.6 cm] = _____ OR 23 in [58.4 cm]
MIN. INTERIOR CABINET DEPTH MIN. LID CUTOUT DEPTH :	D+7.5 in [19 cm] = _____

MIN. LID CUTOUT WIDTH = COMBINED MONITOR WIDTH + 2 in [5.1 cm] OR 34 in [86.4 cm]
WHICHEVER IS GREATER

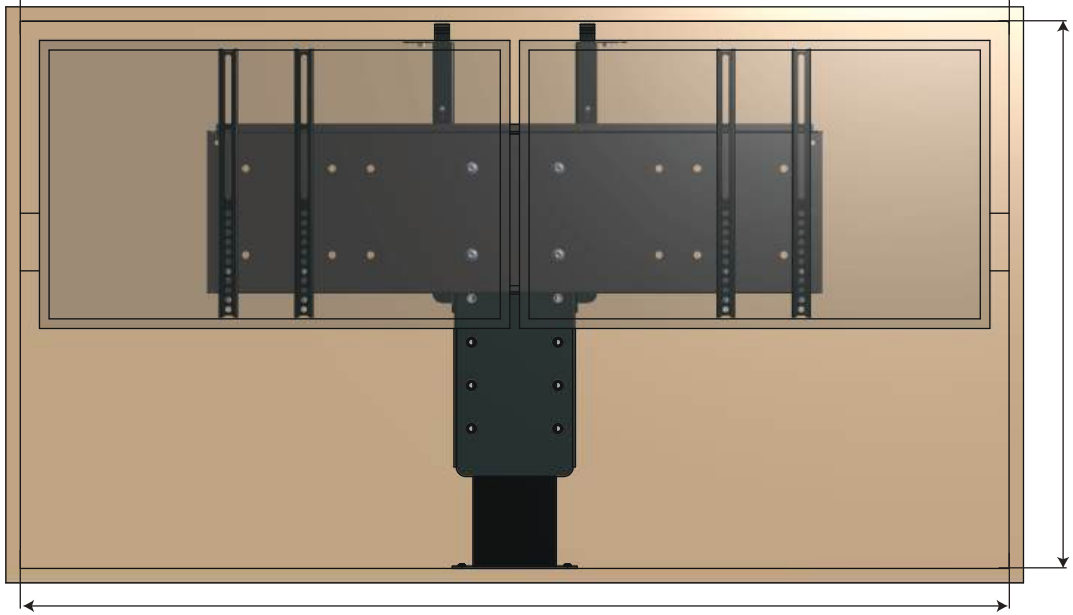

MIN. INTERIOR CABINET HEIGHT =
H + 1 in [2.6 cm] OR
23 in [58.4 cm]
WHICHEVER IS GREATER

MIN. INTERIOR CABINET WIDTH =COMBINED MONITOR WIDTH + 2 in [5.1 cm] OR 34 in [86.4 cm]
WHICHEVER IS GREATER

MIN. LID CUTOUT DEPTH =
D + 7.5 in [19 cm]

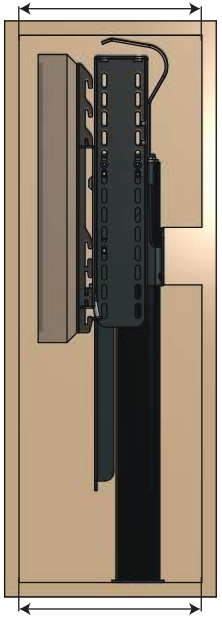

MIN. INTERIOR CABINET DEPTH =
D + 7.5 in [19 cm]

NOTES:
1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
2. WHEN DETERMINING MONITOR HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "MONITOR WITHOUT STAND" HEIGHT
3. LIFT MECHANISM IS POWDER COATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY

IMPORTANT HINGED LID INFORMAITON:
1. HINGED LIDS REQUIRE THE USE OF THE "HINGED TOP GUIDE" ACCESSORY
2. HINGES FOR THE LID ARE NOT PROVIDED BY NEXUS 21
3. SEE PAGE 2 OF THIS DRAWING FOR MORE DETAILED INFORMATION ABOUT THE HINGED LID

NEXUS 21

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 11/14/24

MODEL DM-25 DIAGRAM

WITH HINGED TOP GUIDE - CABINET REFERENCE DIMENSIONS

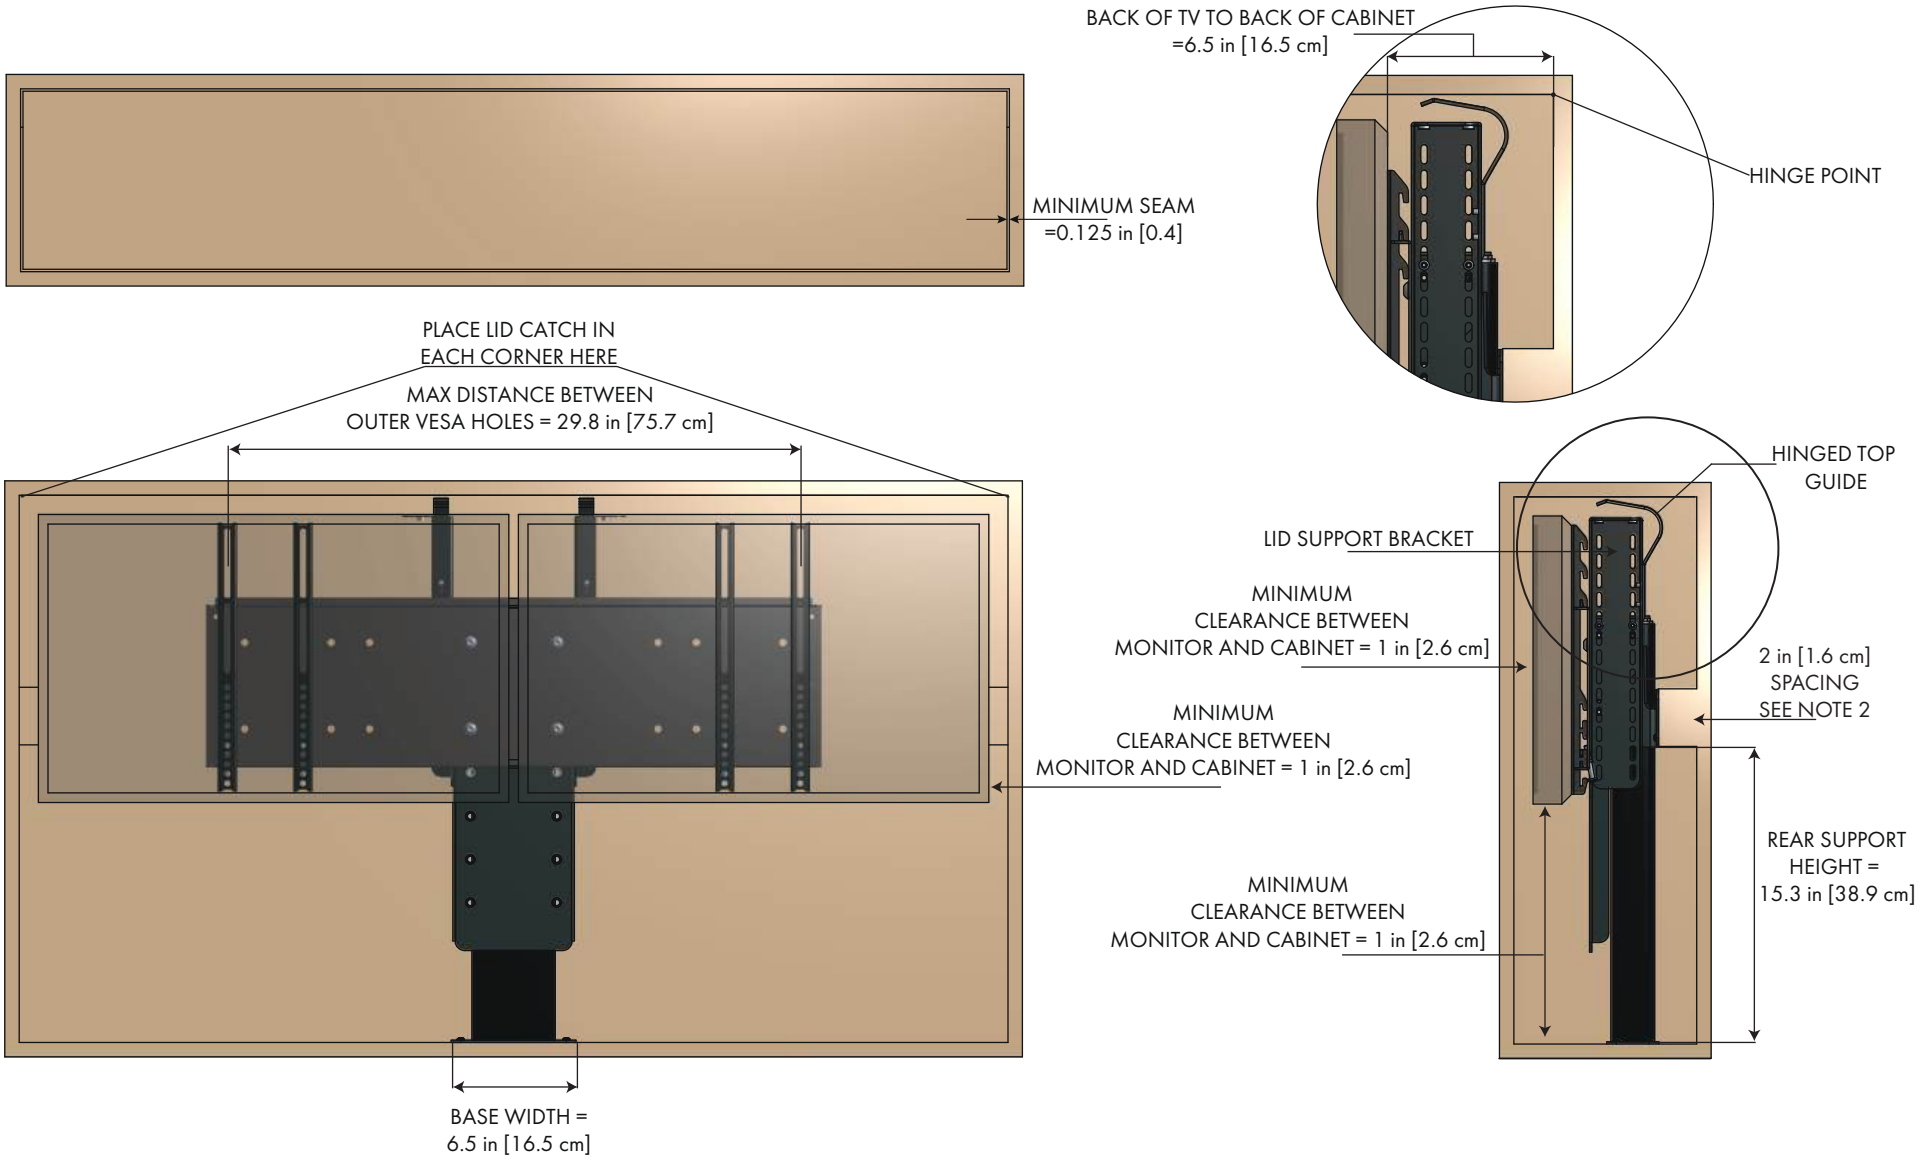

NOTES:

1. HINGED TOP GUIDES CAN BE ADJUSTED WITHIN 0.125 in [0.3 cm] OF THE UNDERSIDE OF THE LID
2. THE LIFT SYSTEM MUST BE SPACED A MINIMUM OF 2 in [5.1 cm] AWAY FROM THE HINGE POINT REGARDLESS OF CABINET DEPTH
3. THE LID MUST HAVE A LID CATCH TO REST ON IN ORDER TO ENSURE IT STAYS FLUSH WITH THE SURROUNDING CABINET OR COUNTERTOP
4. MINIMUM SEAM CAN BE REDUCED TO 0.0625 in [0.2 cm] WITH A 45 DEGREE BEVEL ON THE LID

NEXUS 21

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 11/14/24