MODEL DM-25s DIAGRAM PRIMARY CABINET DIMENSIONS

SPECIFICATIONS	
MAX WEIGHT CAPACITY :	130 lbs [59 kg]
COMBINED WEIGHT OF THE MONITORS, ALL ACCESSORIES, & LID	
MAX TRAVEL [EXTENSION] :	26.5 in [67.3 cm]
LIFT SYSTEM HEIGHT :	24.25 in [61.6 cm] TO 36.25 in [92.1 cm]
MIN MONITOR HEIGHT :	14 in [35.5 cm]
MAX MONITOR HEIGHT :	25.5 in [64.8 cm] MINUS LID THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)	
MONITOR DIMENSIONS:	W_____, H_____, D_____ W_____, H_____, D_____
MIN. INTERIOR CABINET WIDTH MIN. LID CUTOUT WIDTH :	COMBINED MONITOR W+2 in [5.1 cm] = _____ OR 34 in [86.4 cm]
MIN. INTERIOR CABINET HEIGHT :	H+1 in [2.6 cm] = _____ OR 24.25 in [61.6 cm]
MIN. INTERIOR CABINET DEPTH MIN. LID CUTOUT DEPTH :	D+6.125 in [15.6cm] = _____

MIN. LID CUTOUT WIDTH = COMBINED MONITOR WIDTH + 2 in [5.1 cm] OR 34 in [86.4 cm]
WHICHEVER IS GREATER

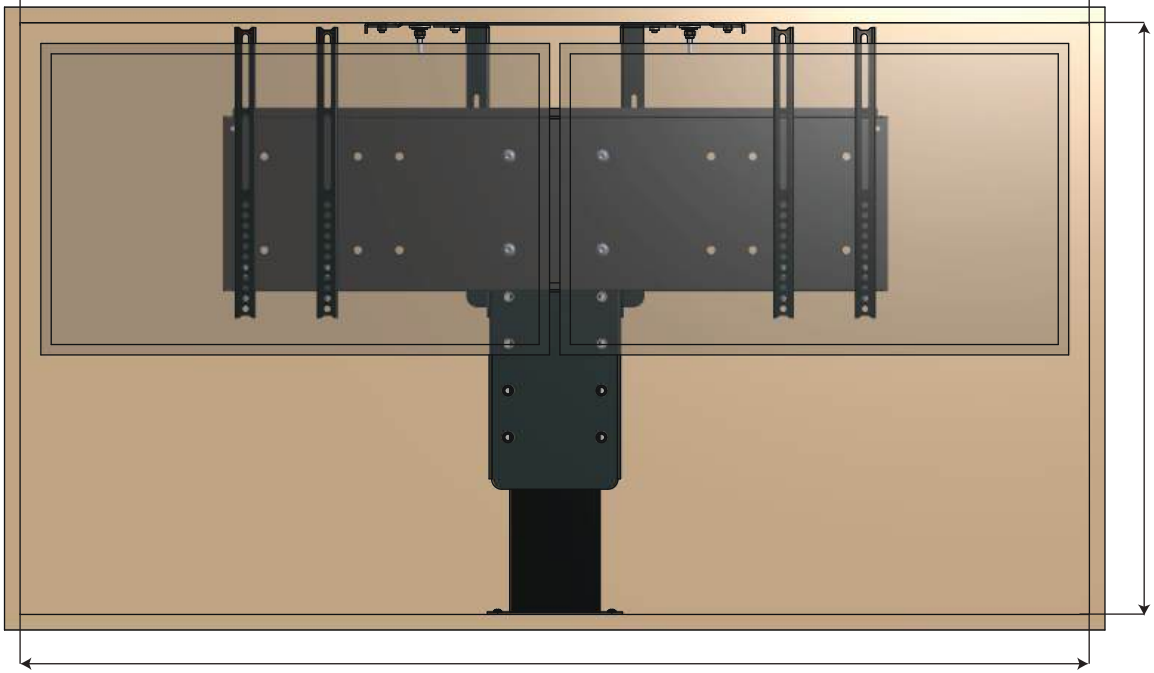

MIN. INTERIOR CABINET HEIGHT =
H + 1 in [2.6 cm] OR
24.25 in [61.6 cm]
WHICHEVER IS GREATER

MIN. INTERIOR CABINET WIDTH =COMBINED MONITOR WIDTH + 2 in [5.1 cm] OR 34 in [86.4 cm]
WHICHEVER IS GREATER

MIN. LID CUTOUT DEPTH =
D + 6.125 in [15.6 cm]

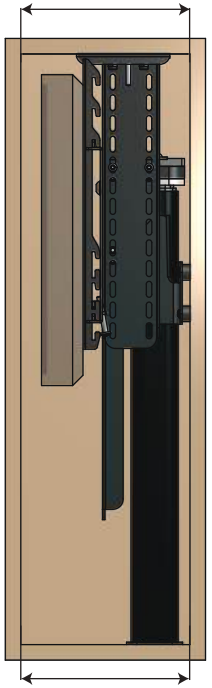

MIN. INTERIOR CABINET DEPTH =
D + 6.125 in [15.6 cm]

NOTES:
1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
2. WHEN DETERMINING MONITOR HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "MONITOR WITHOUT STAND" HEIGHT
3. LIFT MECHANISM IS POWDER COATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY

NEXUS 21

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 11/14/24

MODEL DM-25s DIAGRAM CABINET REFERENCE DIMENSIONS

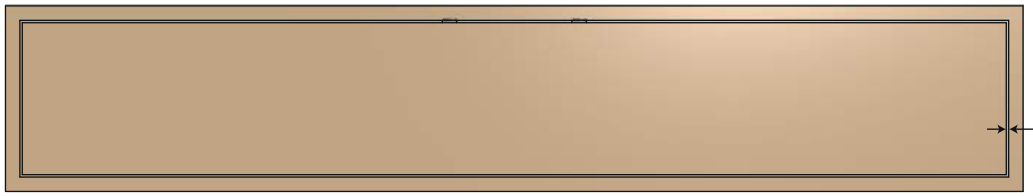

MINIMUM SEAM
=0.125 in [0.4]

BACK OF CABINET TO BACK
OF MONITOR = 5.2 in [11.4 cm]

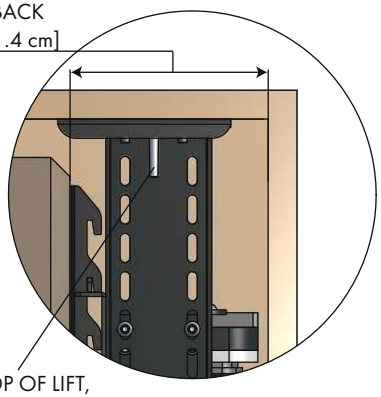

FLOATING LID
DO NOT BOLT LID TO TOP OF LIFT,
USE PROVIDED THREADED TAPERED PINS

PLACE LID CATCH IN
EACH CORNER HERE

MAX DISTANCE BETWEEN
OUTER VESA HOLES = 29.8 in [75.7 cm]

LID PLATE WIDTH = 18 in [45.7 cm]

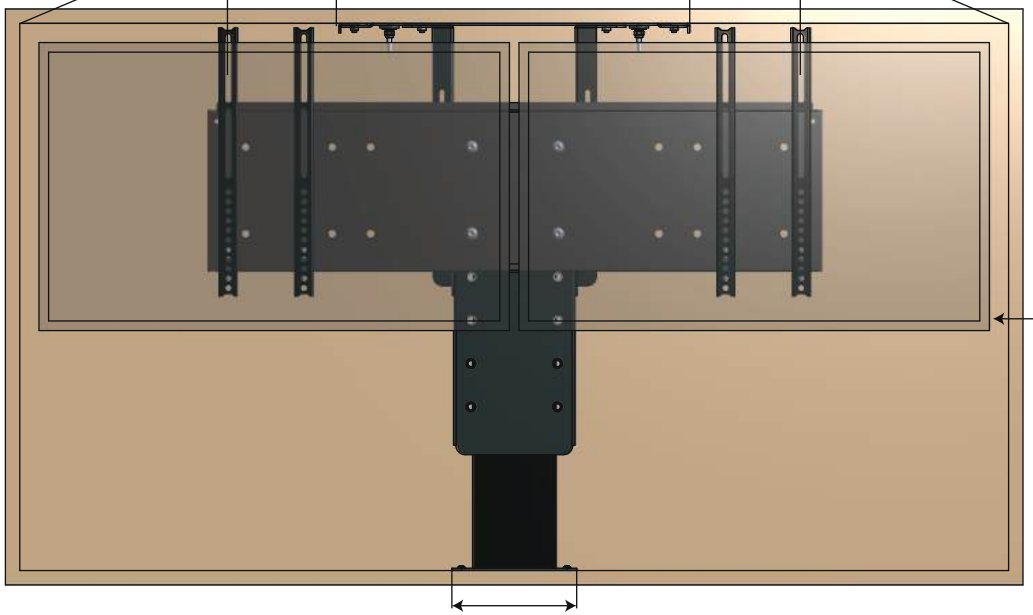

MINIMUM
CLEARANCE BETWEEN
MONITOR AND CABINET = 1 in [2.6 cm]

BASE WIDTH =
6.5 in [16.5 cm]

LID SUPPORTS

MINIMUM
CLEARANCE BETWEEN
MONITOR AND CABINET = 1 in [2.6 cm]

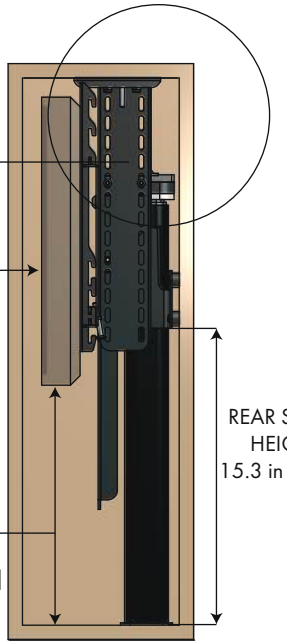

REAR SUPPORT
HEIGHT =
15.3 in [38.9 cm]

MINIMUM
CLEARANCE BETWEEN
MONITOR AND CABINET = 1 in [2.6 cm]

NOTES:
1. LID SUPPORTS ALLOW LID PLATE TO BE ADJUSTED FLUSH WITH UNDERSIDE OF LID
2. LID ADAPTER PLATE ALLOWS LID TO FLOAT WITH THE USE OF LID CATCHES
3. MINIMUM SEAM CAN BE REDUCED TO 0.0625 in [0.2 cm] WITH A 45 DEGREE BEVEL ON THE EDGES OF THE LID

NEXUS 21

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 11/14/24