MODEL M-25 DIAGRAM

WITH HINGED TOP GUIDES - PRIMARY CABINET DIMENSIONS

SPECIFICATIONS (CENTIMETERS ARE REPRESENTED BY [ ])
MAX WEIGHT CAPACITY : 130 LBS [59 KG]
MAX TRAVEL (EXTENSION) : 25" [63.5 CM]
LIFT SYSTEM HEIGHT : 24" [61 CM]
MAX DISPLAY HEIGHT : 21.5" [54.6 CM] MINUS LID THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)	
DISPLAY DIMENSIONS : W_____, H_____, D_____	
MIN. INTERIOR CABINET WIDTH MIN. LID CUTOUT WIDTH	: W+2" [5.1 CM] = _____ OR 20.25" [51.4 CM]
MIN. INTERIOR CABINET HEIGHT	: H+1" [2.6 CM] = _____ OR 23.875" [60.6 CM]
MIN. INTERIOR CABINET DEPTH MIN. LID CUTOUT DEPTH	: D+6" [15.2 CM] = _____ OR 8" [20.3 CM]

MIN. LID CUTOUT WIDTH = DISPLAY WIDTH + 2" [5.1 CM] OR 20.25" [51.4 CM]
WHICHEVER IS GREATER

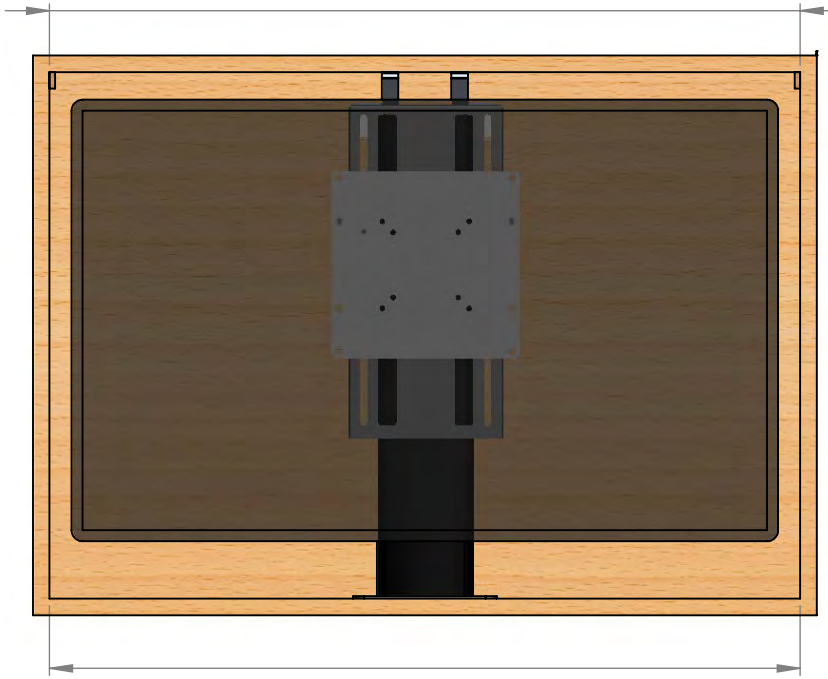

MIN. INTERIOR CABINET WIDTH = DISPLAY WIDTH + 2" [5.1 CM]
OR 20.25" [51.4 CM] WHICHEVER IS GREATER

MIN. LID CUTOUT DEPTH = DISPLAY DEPTH + 6" [15.2 CM] OR 8" [20.3 CM]
WHICHEVER IS GREATER

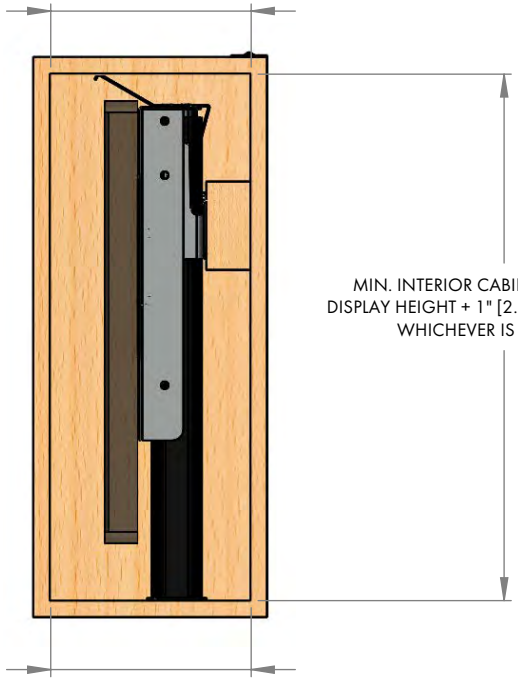

MIN. INTERIOR CABINET HEIGHT =
DISPLAY HEIGHT + 1" [2.6 CM] OR 23.875" [60.6 CM]
WHICHEVER IS GREATER

MIN. INTERIORDISPLAY DEPTH + 6" [15.2 CM] OR 8" [20.3 CM] CABINET DEPTH =
WHICHEVER IS GREATER

NOTES:
1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
2. WHEN DETERMINING DISPLAY HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "DISPLAY WITHOUT STAND" HEIGHT
3. LIFT MECHANISM IS POWDERCOATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY
4. THE HEIGHT OF THIS MODEL IS NOT ADJUSTABLE; A PLATFORM MUST BE USED TO INCEASE LIFT SYSTEM HEIGHT

IMPORTANT HINGED LID INFORMATION
1. HINGED LIDS REQUIRE THE USE OF THE "HINGED TOP GUIDE" ACCESSORY
2. HINGES FOR THE LID ARE NOT PROVIDED BY NEXUS 21
3. SEE PAGE 2 OF THIS DRAWING FOR MORE DETAILED INFORMATION ABOUT THE HINGED LID

NEXUS 21

COPYRIGHT 2023 - ALL RIGHTS RESERVED
UPDATED 2/20/23

MODEL M-25 DIAGRAM

WITH HINGED TOP GUIDES - CABINET REFERENCE DIMENSIONS

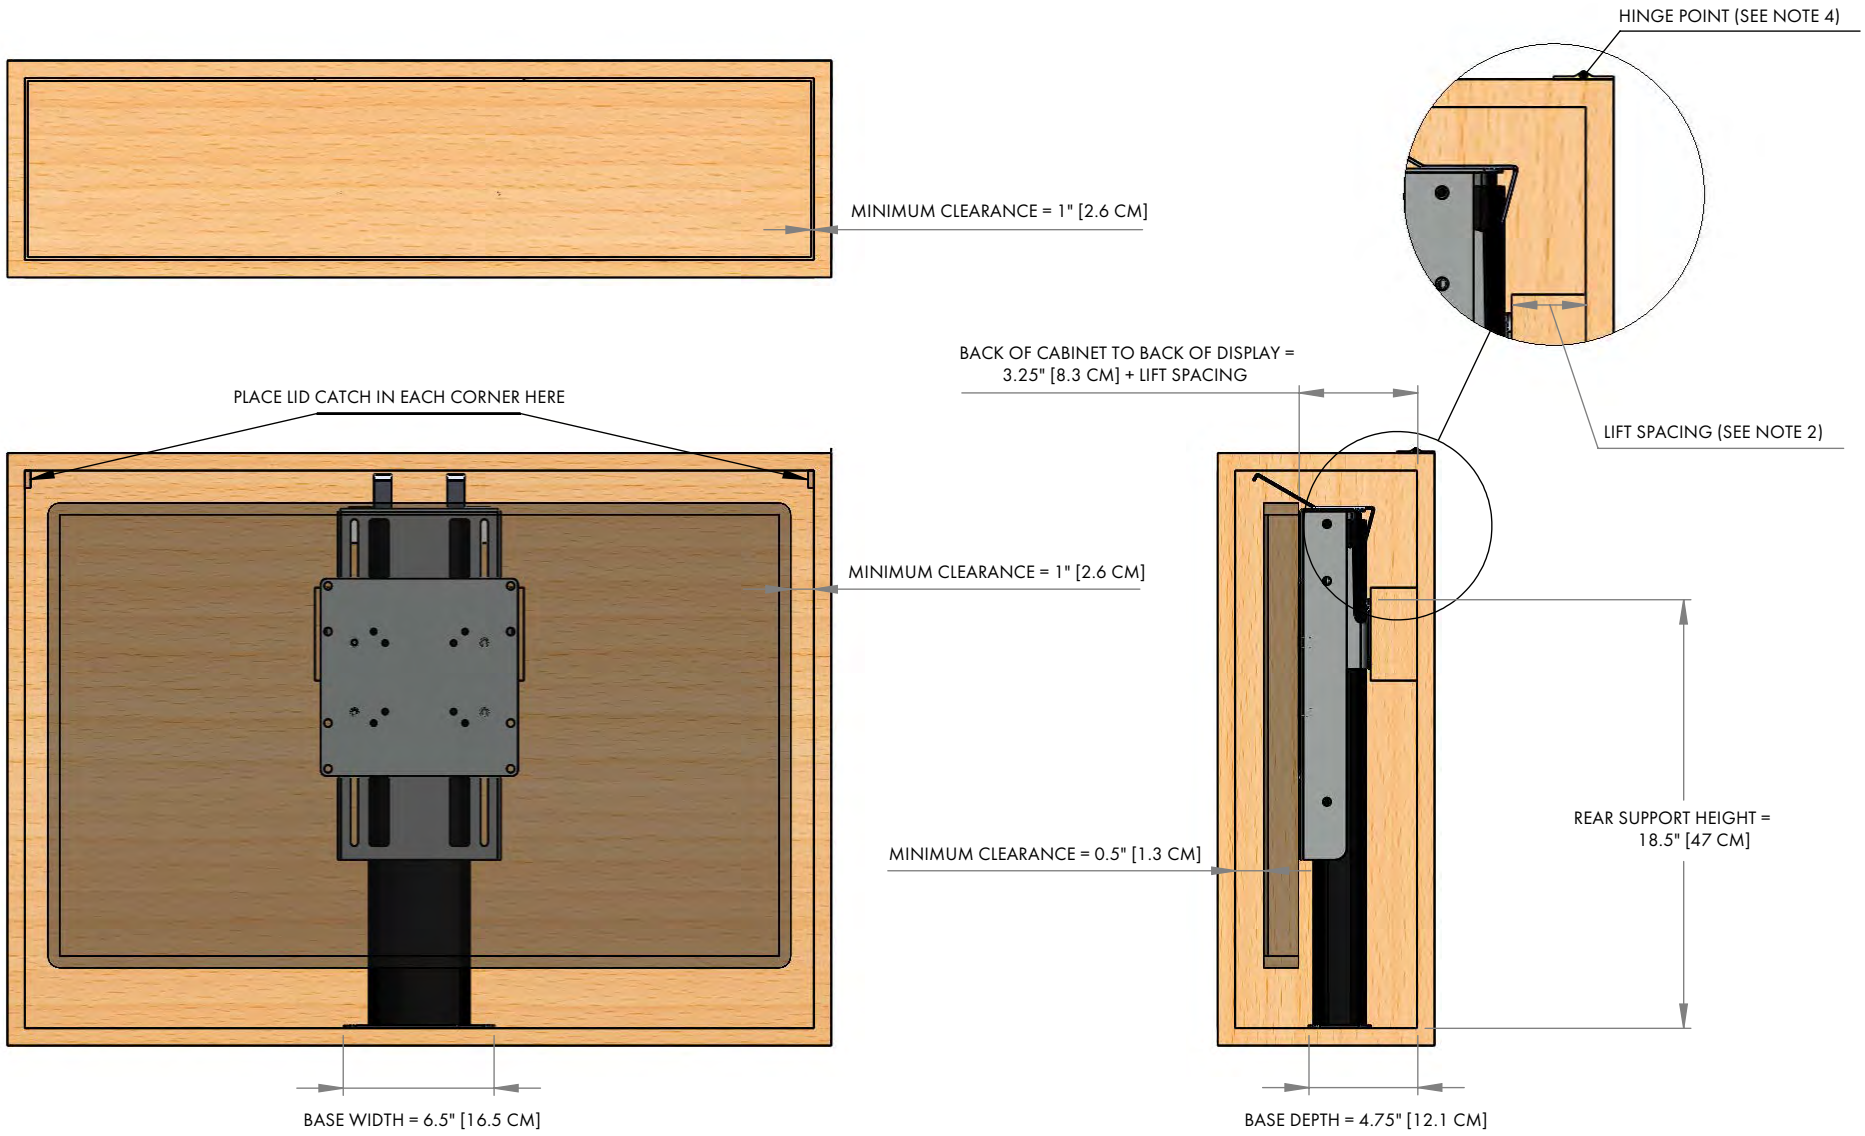

NOTES:
1. TOP SUPPORT BRACKETS ALLOW THE HINGED TOP GUIDES TO BE ADJUSTED FLUSH WITH UNDERSIDE OF LID
2. LIFT SYSTEM MUST BE SPACED A MINIMUM OF 2" [5.1 CM] AWAY FROM THE HINGE POINT REGARDLESS OF CABINET DEPTH
3. MINIMUM SEAM CAN BE REDUCED TO 0.0625" [0.2 CM] WITH A 45 DEGREE BEVEL ON THE LID
4. PIANO HINGE SHOWN FOR REFERENCE; HOWEVER, OTHER HINGE TYPES CAN BE USED

NEXUS 21

COPYRIGHT 2023 - ALL RIGHTS RESERVED
UPDATED 2/20/23