MODEL L-50ens

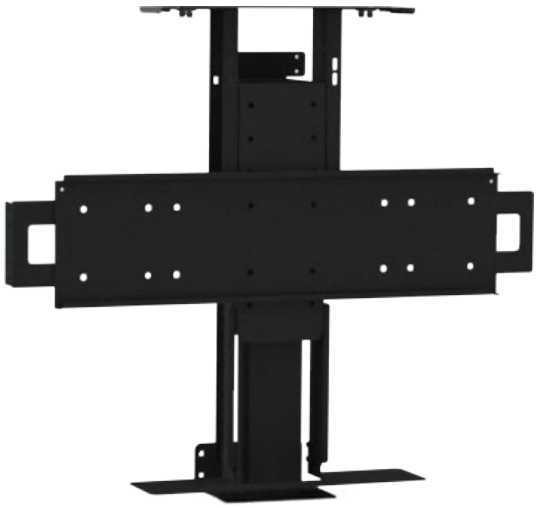

POP-UP SWIVEL ENCLOSURE TV LIFT

For Up to 60″ TV

TV Maximum Screen Size	60″
Maximum Weight	100 lbs [45.4 kg]

Model L-50ens is perfect for situations when the backside of the television is exposed, like at the foot of the bed or in a half wall. The lift and bracket system allow you to place an enclosure around the television that will seamlessly integrate the TV into the decor of the room. The smooth manual swivel function enables you to face the TV in any direction, creating the ideal viewing angle (enclosure itself is not included).

- Near Silent Operation
- Manual Swivel with Safety Cutoff
- Remote Control Included
- Popular in Applications Where Back of TV is Exposed

All Nexus products are shipped in custom-made protective packaging, and they include everything you need to mount and operate them. The products are designed for easy assembly, and simple instructions with photos are included.

MODEL L-50ens

TECHNICAL SPECIFICATIONS

- 100 lbs [45.4 kg] total lift capacity
- TV maximum screen size: 60"
- 360-degree manual swivel mechanism built-in (swivel function is operated manually)
- Travels 39.25" [99.7 cm]
- No exposed tracks, gears or scissors
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Speed 1.5" [3.8 cm] / sec. (only 26 sec. to fully raise)
- Quiet - runs at just 45 dB
- Screw-driven mechanism
- Steel construction
- Choice of RF remote, Control System Integration Kit (includes IR remote and contact closure interface), or IP control device
- Exclusive Nexus 21 Safety Package included
- "Soft Start" and "Soft Stop" for smooth ride
- Power is available in these formats: USA, 110V / Europe, 230V / Japan, 100V / Australia, 240V / UK, 230V

WHAT'S IN THE BOX

- Motorized lift column (the motorized unit is pre-assembled and ready to use)
- Manual swivel mechanism with electronic safety switch
- Heavy duty screen support with universal TV mounting plate
- Height adjustable top supports
- Universal mounting brackets for TV enclosure (enclosure itself is not provided)
- Top plate with adjustable extensions and finger safety
- Upper and lower back mounting brackets
- Control box with power cord
- Remote control and receiver (your choice of RF, CSI Kit*, or IP control device)
- Backup control switch
- Cord control wrap
- All hardware for assembly and mounting
- Full assembly instructions with photos

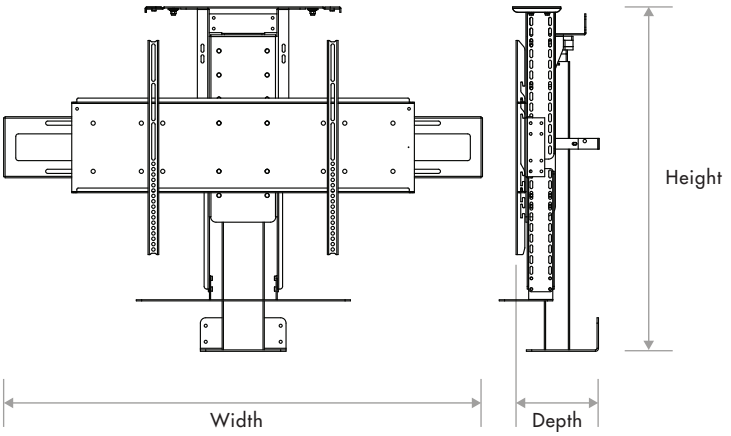

Height: 32.25" [81.9cm] Min / 42.25" [107.3cm] Max
Adjustable in ¼" [0.6 cm] increments
Width: 37.75" [95.9cm] Min/54.625" [138.7cm] Max
Depth: 7.75" [19.7 cm] from back wall to back of TV

CONTROL OPTIONS

Choice of RF remote, CSI Kit*, or IP control device.
Wired button pad included with all.

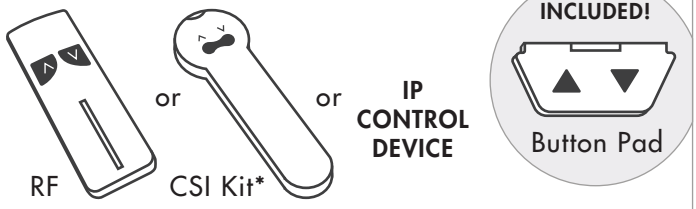

**CSI Kit (Control System Integration) includes IR remote and contact closure interface*

SWIVEL VERSION
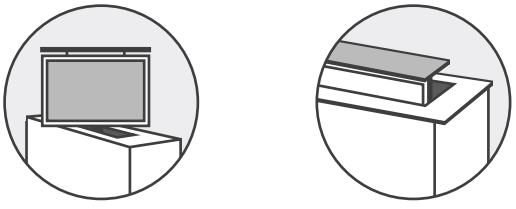
360-degree manual swivel mechanism built-in.
Mounting bracket for floating lid with built-in finger safety system is included.