MODEL L-65 DIAGRAM WITH HINGED TOP GUIDE & SOUNDBAR - PRIMARY CABINET DIMENSIONS

**** IF USING A 65" TV WITH A SOUNDBAR, PLEASE PAY SPECIAL ATTENTION TO THE HEIGHT. THE TOTAL EXTENSION ON THIS LIFT IS 38.5" (97.5 CM), SO SOME SOUNDBARS MAY BE TOO TALL.***

SPECIFICATIONS
MAX WEIGHT CAPACITY : 100 lbs [45.4 kg]
MAX TRAVEL [EXTENSION] : 38.5 in [97.7 cm]
LIFT SYSTEM HEIGHT : 32 in [81.3 cm] TO 41 in [104.1 cm]
MAX TV +SOUNDBAR HEIGHT : 37.75 in [95.9 cm] MINUS LID THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)	
TV DIMENSIONS : W_____, H_____, D_____	
SOUNDBAR DIMENSIONS : SW_____, SH_____, SD_____	
MIN. INTERIOR CABINET WIDTH MIN. LID CUTOUT WIDTH	: W + 2 in [5.1 cm] OR SW + 2 in [5.1 cm] = _____ OR 34 in [86.4 cm]
MIN. INTERIOR CABINET HEIGHT	: H + SH + 2 in [5.1 cm] = _____ OR 32.25 in [82 cm]
MIN. INTERIOR CABINET DEPTH MIN. LID CUTOUT DEPTH	: D + 8.375 in [21.3 cm] OR SD + 7.25 in [18.4 cm] = _____

MIN. LID CUTOUT WIDTH = W + 2 in [5.1 cm] OR SW + 2 in [5.1 cm] OR 34 in [86.4 cm]
WHICHEVER IS GREATER

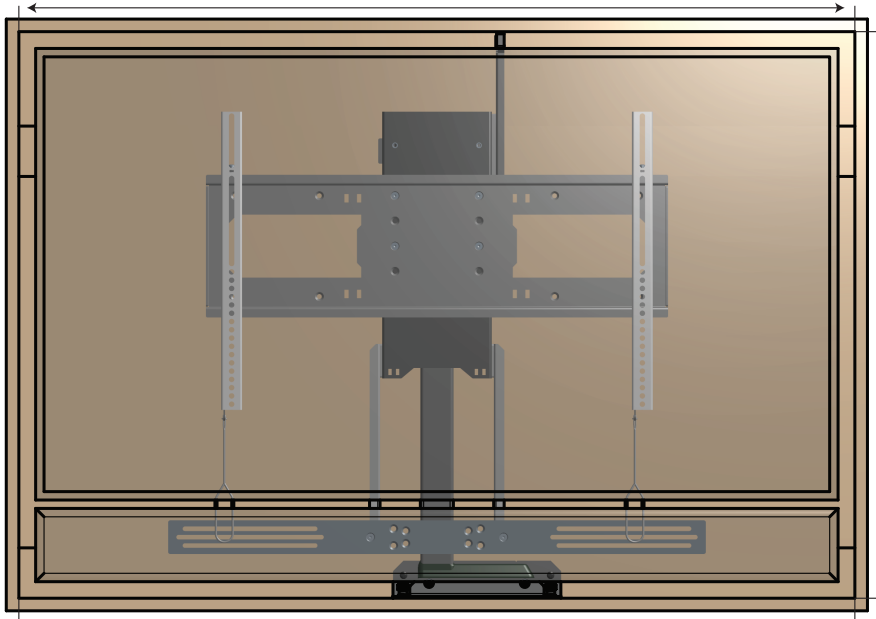

MIN. INTERIOR CABINET HEIGHT =
H + SH + 2 in [5.1 cm] OR 32.25 in [82 cm]
WHICHEVER IS GREATER

MIN. INTERIOR CABINET WIDTH = W + 2 in [5.1 cm] OR SW + 2 in [5.1 cm] OR 34 in [86.4 cm]
WHICHEVER IS GREATER

MIN. LID CUTOUT DEPTH =
D+ 8.375 in [21.3 cm] OR SD + 7.25 in [18.4 cm]
WHICHEVER IS GREATER

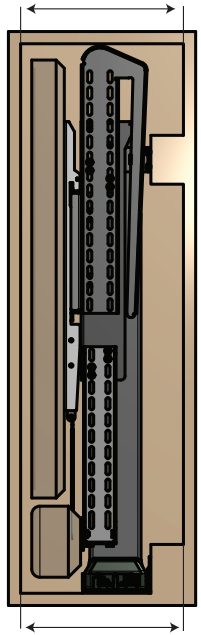

MIN. INTERIOR CABINET DEPTH =
D + 8.375 in [21.3 cm] OR SD + 7.25 in [18.4 cm]
WHICHEVER IS GREATER

NOTES:
1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
2. WHEN DETERMINING TV HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "TV WITHOUT STAND" HEIGHT
3. LIFT MECHANISM IS POWDER COATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY

IMPORTANT HINGED LID INFORMATION:
1. HINGED LIDS REQUIRE THE USE OF THE "HINGED TOP GUIDE" ACCESSORY
2. HINGES FOR THE LID ARE NOT PROVIDED BY NEXUS 21
3. SEE PAGE 2 OF THIS DRAWING FOR MORE DETAILED INFORMATION ABOUT THE HINGED LID

NEXUS 21

COPYRIGHT 2023 - ALL RIGHTS RESERVED
UPDATED 5/17/24

MODEL L-65 DIAGRAM WITH HINGED TOP GUIDE & SOUNDBAR - CABINET REFERENCE DIMENSIONS

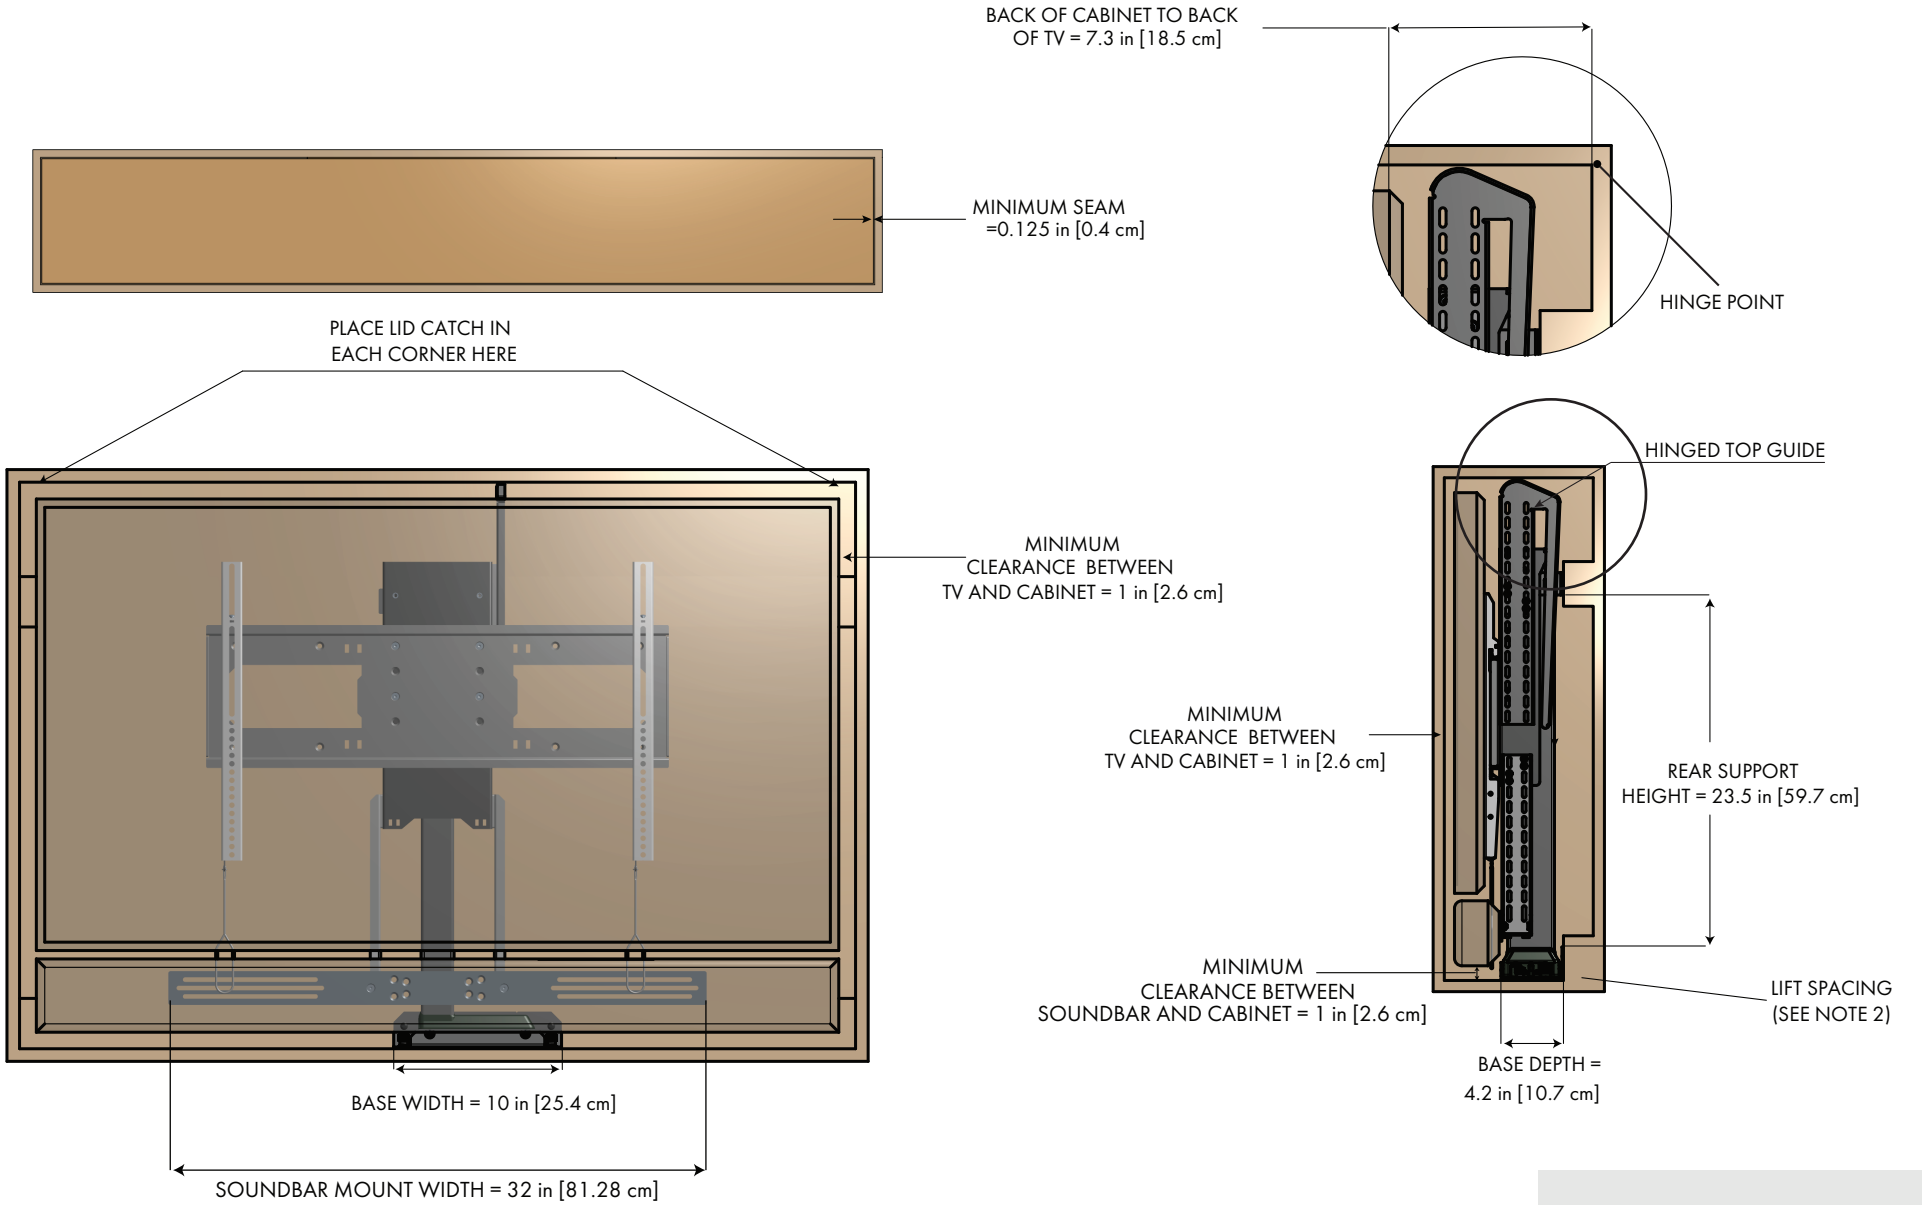

NOTES:
1. HINGED TOP GUIDES CAN BE ADJUSTED WITHIN 0.125 in [0.3 cm] OF THE UNDERSIDE OF LID
2. THE LIFT SYSTEM MUST BE SPACED A MINIMUM OF 2 in [5.1 cm] AWAY FROM THE HINGE POINT REGARDLESS OF CABINET DEPTH
3. THE LID MUST HAVE A LID CATCH TO REST ON IN ORDER TO ENSURE IT STAYS FLUSH WITH THE SURROUNDING CABINET OR COUNTERTOP
4. MINIMUM SEAM CAN BE REDUCED TO 0.0625 in [0.2 cm] WITH A 45 DEGREE BEVEL ON THE LID

NEXUS 21

COPYRIGHT 2023 - ALL RIGHTS RESERVED
UPDATED 5/17/24